




▲ Features

- Superior performance with small ripple
- 100% full load burn-in test
- Protections: short circuit/overload/over voltage
- LED indicator for power on
- Optional rail mounting bracket can be installed on DIN rail TS35
- Instant overload capability is 120%-150%
- Cooling by free air convection
- Seismic protection
- “Three pivot points” M4 large caliber installation
- “Three proof” treatment, suitable for severe environment
- Terminal with protective cover
- All aluminum case
- Surge protection
- 3 years warranty

▲ Applications

- Industrial automation control system
- Intelligent control system
- Electronic instruments and devices
- LED control
- Household appliances

▲ Model Encoding

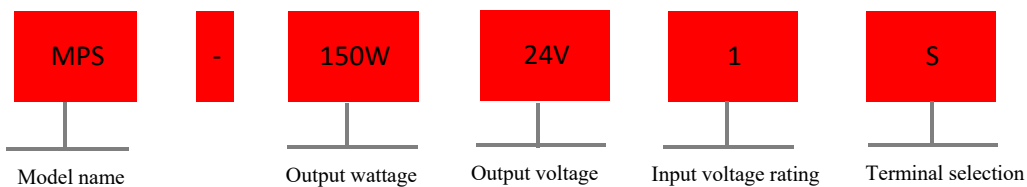




Specification

Input								
Voltage range	176-264VAC 250-370VDC							
AC current	2.0A/230VAC							
Frequency range	47-63Hz							
Inrush current (max)	44A/230VAC							
Output								
DC voltage (V)	5V	7.5V	9V	12V	15V	24V	36V	48V
Efficiency	80%	80%	80%	83%	84%	86%	86%	86%
Voltage ADJ.range	±10%							
Rated Current(A)	19A	17.4A	16.7A	12.5A	10A	6.5A	4.2A	3.2A
Rated power(W)	130W	130.5W	150.3W	150W	150W	156W	151.2W	153.6W
Ripple & noise(max) Note.2	80mVp-p	120mVp-p	120mVp-p	120mVp-p	120mVp-p	120mVp-p	130mVp-p	200mVp-p
Voltage tolerange Note.3	±1%							
Line regulation Note.4	±0.5%							
Load regulation Note.5	±0.5%							
Setup, rise time	800ms 20ms/230VAC(at full load)							
Hold up time	24ms/230VAC(at full load)							
Status indicator	Green LED							
Protection								
Overload	120%-150% rated output power							
	Protection type: Hiccup mode, recovers automatically after fault condition is removed							
Over voltage(V)	5.6-6.8V	8.6-10.1V	10.4-12.2V	13.8-16.2V	18-21V	27.6-32.4V	41.4-46.8V	57.6-67.2V
	Protection type: Hiccup mode, recovers automatically after fault condition is removed							
Three proof treatment	Suitable for high dust, condensation occasions							
Safety and EMC								
Withstand voltage	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC							
Isolation resistance	I/P-O/P,I/P-FG,O/P-FG:100M Ohms/500VDC/25°C/70% RH							
Safety standards	Design refer to EN IEC 62368-1、GB4943.1							
EMC emission	Parameter	Standard			Test Level			
	Conducted	EN 55032			Class A			
	Radiated	EN 55032			Class A			
	Voltage Flicker	EN 61000-3-3			Design refer to Class A			
	Harmonic Current	EN IEC 61000-3-2			Design refer to Class A			
EMC immunity	Parameter	Standard			Test Level			
	ESD	EN 61000-4-2			Level 3 8KV air;Level 2 4KV contact			
	Radiated Susceptibility	EN 61000-4-3			Level 2 3V/m			
	EFT/Burest	EN 61000-4-4			Level 3 2KV			
	Surge	EN 61000-4-5			Level 3 2KV/Line-Line;Level3 4kV/Line-Line-FG			
	Conducted	EN 61000-4-6			Level 2 3V			
	Magnetic Field	EN 61000-4-8			Level 2 3A/m			
	Voltage Dips and interruptions	EN 61000-4-11			< 5% residual voltage for 0.5 cycles ,70% residual voltage for 25 cycles , < 5% residual voltage for 250 cycles:			
Environmental								
Working temperature	- 25~+60°C(Refer to "Derating curve ")							
Storage temperature	- 40~+85°C							
Storage humidity	10-95% RH							
Vibration	Component:10-500Hz,2G 10 min/1cycle 60 min each along X,Y,Z axes							
Others								
Mean time between failure	≥320K hrs,MIL-HDBK-217F(25°C)							
Installation	Plate screws fixed, or optional accessories can be TS35 guide rail installation							
Protection class	IP20							
Weight	About 0.49Kg							
Length*width*height	168*98*38mm							

Data	Details	Model name
	MPS 95W 19A/05V	MPS-150W05V1S
	MPS 130.5W 17.4A/7.5V	MPS-150W07V1S
	MPS 150.3W 16.7A/09V	MPS-150W09V1S
	MPS 150.0W 12.5A/12V	MPS-150W12V1S
	MPS 150.0W 10A/15V	MPS-150W15V1S
	MPS 156W 6.5A/24V	MPS-150W24V1S
	MPS 151.2W 4.2A/36V	MPS-150W36V1S
	MPS 153.6W 3.2A/48V	MPS-150W48V1S
Attachment	Details	Model name
Rail pin	TS35 installation accessories	MPS-F050C

Installation Instruction

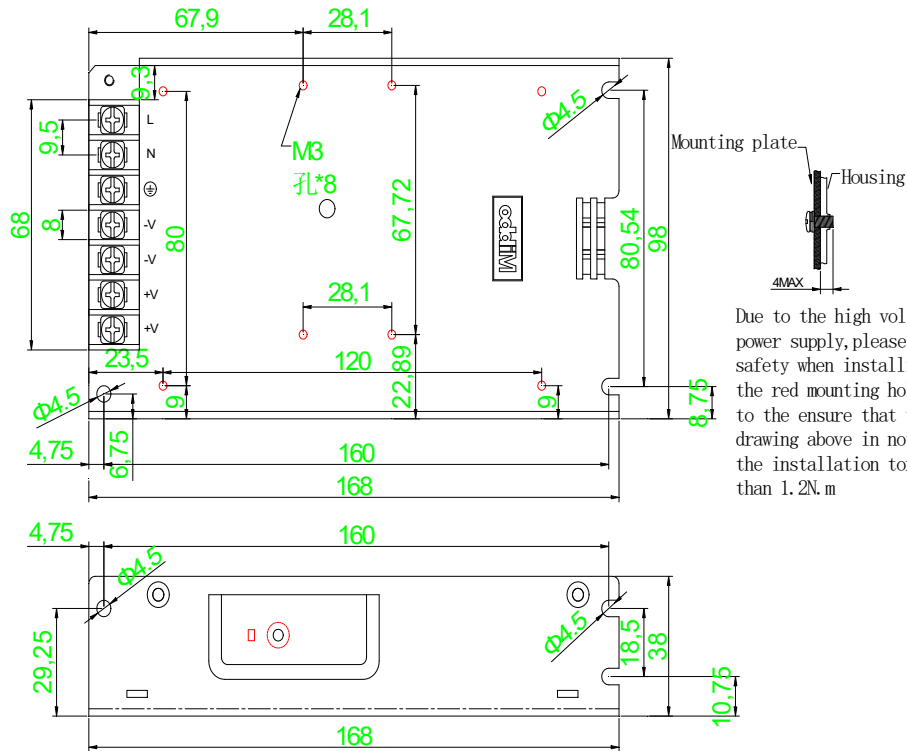


Due to the high voltage inside the power supply, please kindly ensure the safety when installing the screws in the red mounting hole, It is necessary to ensure that the size in the drawing above is not more than 4mm, and the installation torque is not more than 1.2N.m

Installation Instructions

Terminal Spec	U Type of the width of the terminal	Wire installation specification	Max. Torque
95 Terminal	8mm MAX	22-12AWG	1.2N.m(MAX)

Derating curve

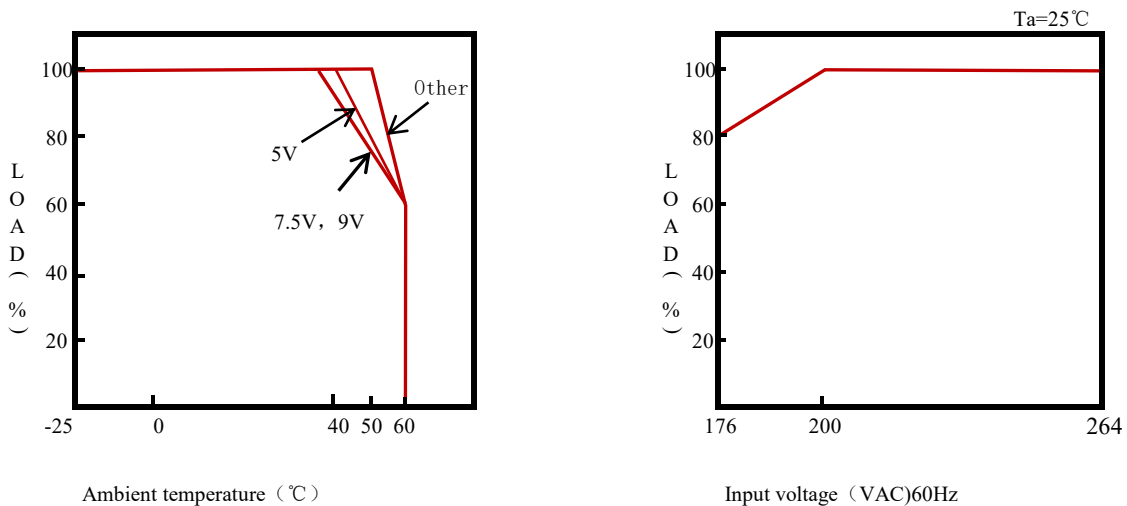

- Note:**
1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
 2. Ripple & noise are measured at 20MHZ of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor."
 3. Tolerance: includes set up tolerance, line regulation and load regulation.
 4. Line regulation is measured from low line to high line at rated load.
 5. Load regulation is measured from 0% to 100% rated load.
 6. According to the requirements of GB4943.1, the power supply is only used for safe use in areas below sea level of 2000M and non-tropical climates.